


## Frame Scaffold Measurement Guide

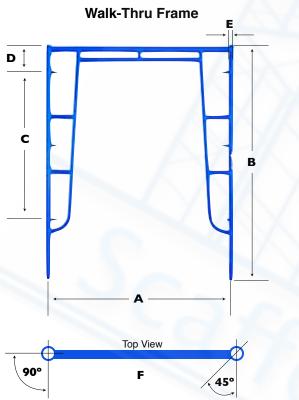

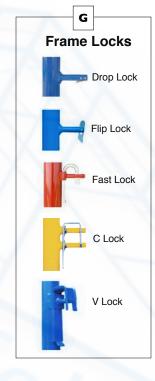

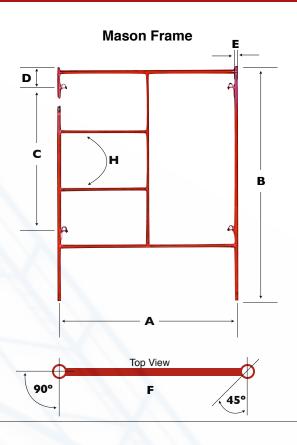

Frame Width

Measure from center of frame leg-to center of frame leg.

Frame Height

Measure from top of frame leg-to bottom of frame leg (without coupling pin).

Lock Spacing

Measure the distance from the center of the top lock to the center of the bottom lock (where the cross braces attach).

Location of Top Lock

Measure the distance from the top of the frame leg to the center of the top lock.

Diameter of the Frame Leg

Measure frame leg, outside to outside. Common sizes: 1.5", 1.625" & 1.69" (It's best to use a caliper)

Specify the Angle of Pin Holes

45° or 90°

G. xxxxxx What type of Frame Locks are on your frame? \_\_\_\_

Please list the name.

H. xxxxxx Do you have a Walk-Thru Frame, or a Mason Frame?

Please list the name.

I. xxxxxx If you have a Mason Frame, how many steps does it have?

Number of intermediate steps, or rungs.

J. xxxxxx Are there any manufacturer's labels on your scaffolding? \_\_\_

Please list the name.



0210-2014 © STI d/b/a Scaffold Store 2014 - Printed in the USA